

C-TEK 2.54 / 2.00 / 1.27MM PITCH IDC SOCKET




MATERIAL:

INSULATOR : PBT + 30% GLASS FIBER (UL94V-0).
CONTACT : BRASS.

ELECTRICAL CHARACTERISTICS:

CURRENT RATING : 3 AMPS.
WITHSTANDING VOLTAGE : AC 500V R.M.S.
INSULATOR RESISTANCE : 5000 MEGOHMS MIN.
CONTACT RESISTANCE : 20 MILLIOHMS MAXIMUM.
OPERATING TEMPERATURE : -40°C ~ +105°C

DIMENSIONS

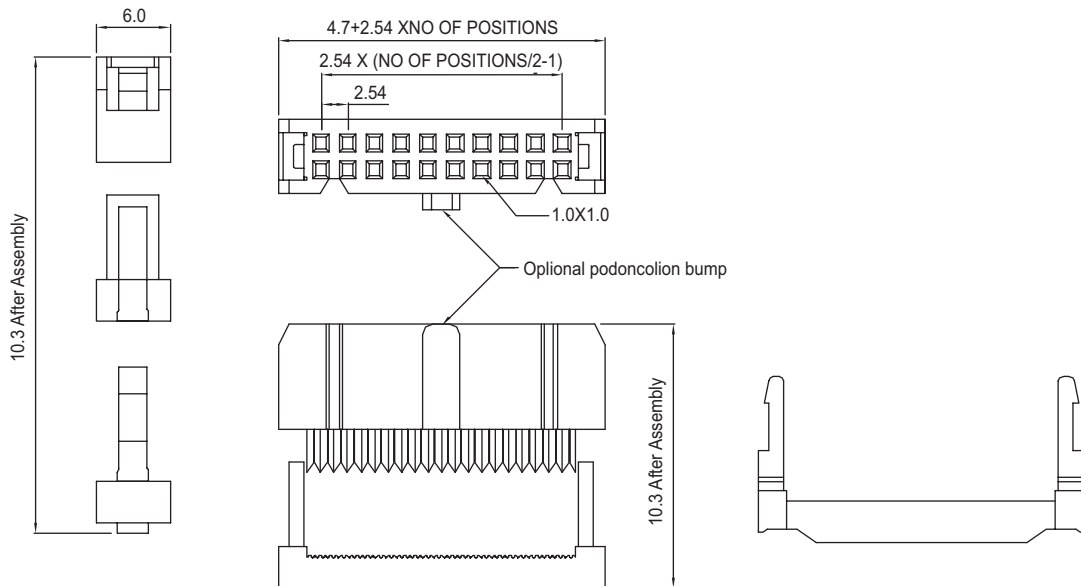

UNIT: MM

HOW TO ORDER

SERIES NO.	PITCH	CONTACT NO.	PLATING	STRAIN RELIEF	HOUSING MATERIAL	COLOR	CENTER BUMP
5011	A	10	G	1	P	B	B
	A: 2.54MM B: 2.00MM C: 1.27MM x 1.27MM	8 ~ 64	G: GOLD PLATED S: SELECTIVE GOLD PLATED	1: W/O SR 2: W/SR	P: PBT H: HIGH TEMP.	B: BLACK G: GRAY	C: W/O CB B: W/CB