


C-TEK D-SUB HD 15P FEMALE TO DVI COMBO

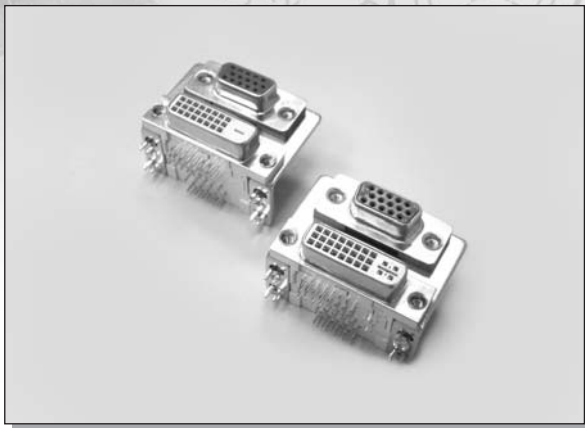

MATERIAL:

INSULATOR : PBT + 30% GLASS FIBER (UL94V-0).

CONTACT : PHOSPHOR BRONZE OR BRASS.

(STANDARD IS BRASS)

ELECTRICAL CHARACTERISTICS:

CURRENT RATING : 5 AMPS.



WITHSTANDING VOLTAGE : AC 1250V R.M.S.

INSULATOR RESISTANCE : 5000 MEGOHMS MIN. AT 500V DC.


CONTACT RESISTANCE : 15 MILLIOHMS MAX.

OPERATING TEMPERATURE : -55°C ~ +105°C

DIMENSIONS

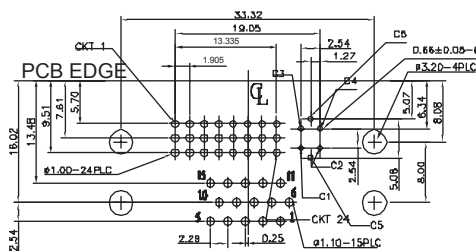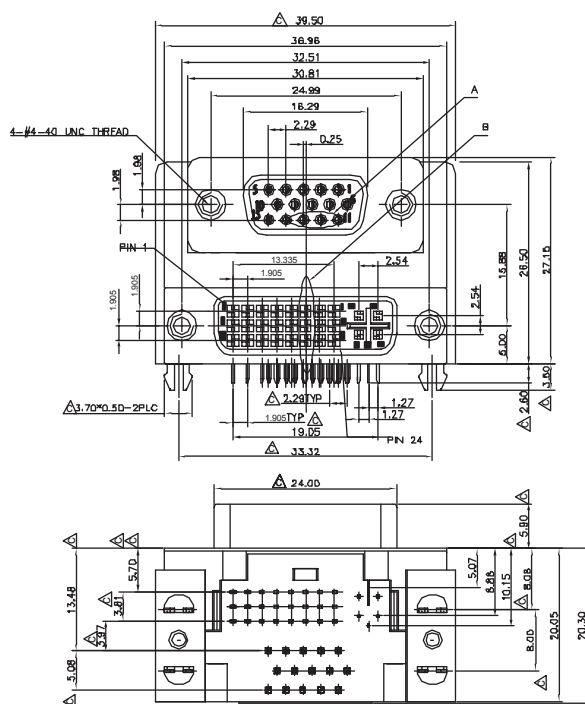

RECOMMED PCB LAYOUT
BOTTOM VIEWS



HOW TO ORDER

SERIES NO.	CONTACT NO.	PLATING	RIVET & HEX SCREW	HOUSING MATERIAL	SCREW TYPE
1016	1	S	1	P	1
	1: H.D. 15F + DVI 24P 2: H.D. 15F + DVI 29P	S: SELECTIVE GOLD PLATED S1: SELECTIVE GOLD 5u" S2: SELECTIVE GOLD 10u" S3: SELECTIVE GOLD 15u" S4: SELECTIVE GOLD 30u"	1: 4-40" INSERT/CAPTIVE NUT WITH FEMALE 4-40" HEX SL WITH BL 2: 4-40" INSERT/CAPTIVE NUT ATTACH FEMALE 4-40" HEX SL WITH BL 3: 4-40" INSERT/CAPTIVE NUT WITH BL	P: PBT H: HIGH TEMP.	1: NUT: 4.8MM TOTAL LENGTH: 11.8MM 2: NUT: 4.8MM TOTAL LENGTH: 13MM 3: NUT: 5.8MM TOTAL LENGTH: 13MM