

C-TEK DVI PCB FEMALE STRAIGHT TYPE




MATERIAL:

INSULATOR : PBT + 30% GLASS FIBER (UL94V-0).
CONTACT : PHOSPHOR BRONZE OR BRASS.
(STANDARD IS BRASS)

ELECTRICAL CHARACTERISTICS:

CURRENT RATING : 5 AMPS.
WITHSTANDING VOLTAGE : AC 1250V R.M.S.
INSULATOR RESISTANCE : 5000 MEGOHMS MIN. AT 500V DC.
CONTACT RESISTANCE : 15 MILLIOHMS MAX.
OPERATING TEMPERATURE : -55°C ~ +105°C

DIMENSIONS

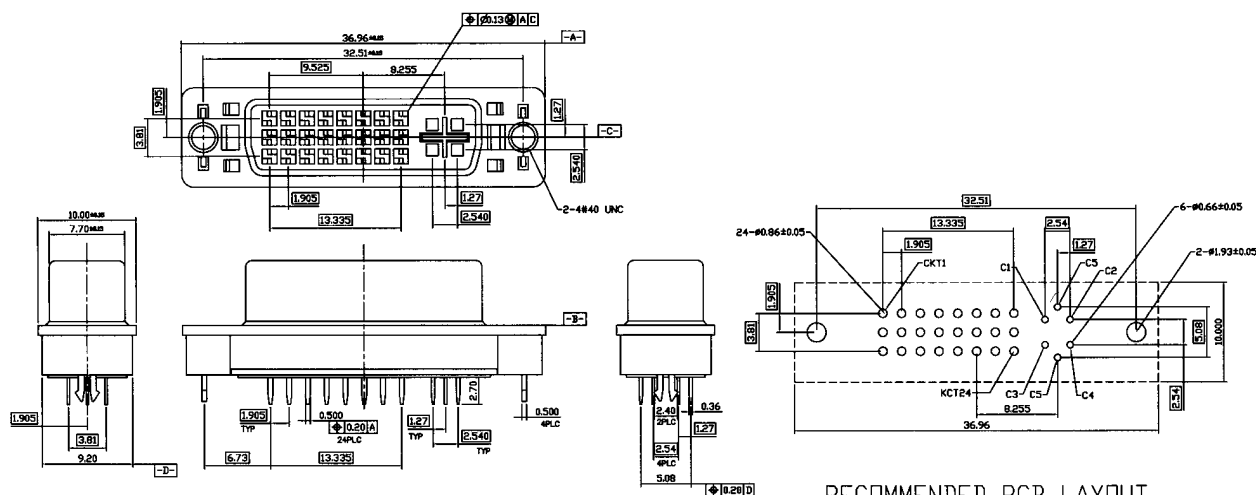

RECOMMENDED PCB LAYOUT

HOW TO ORDER

SERIES NO.	CONTACT NO.	CONTACT TYPE	PLATING	RIVET & HEX SCREW	COLOR	HOUSING MATERIAL
1018	24	F	S	1	B	P
	24 29	F: FEMALE M: MALE	S: SELECTIVE GOLD PLATED	1: 4-40" UNC THREADED INSERT 2: 4-40" UNC HEX SCREWLOCK	B: BLACK W: WHITE	P: PBT H: HIGH TEMP