


C-TEK USB B TYPE P.C.B FEMALE TYPE

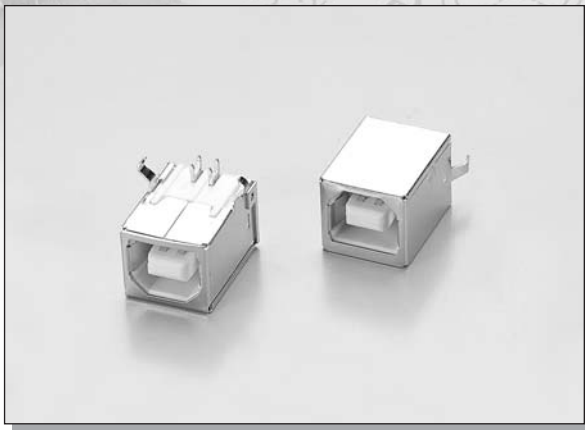

MATERIAL:

HOUSING : PBT + GF, UL 94V-0 RATED.

CONTACT : COPPER ALLOY.

ELECTRICAL CHARACTERISTICS:

CURRENT RATING : 5 AMPS.





VOLTAGE : 30V AC. (R.M.S.)

CONTACT RESISTANCE : 30 MILLIOHMS MAXIMUM INITIAL.

INSULATION RESISTANCE : 1000 MEGOHMS MINIMUM.

OPERATING TEMPERATURE : -55°C ~ +85°C

DIMENSIONS

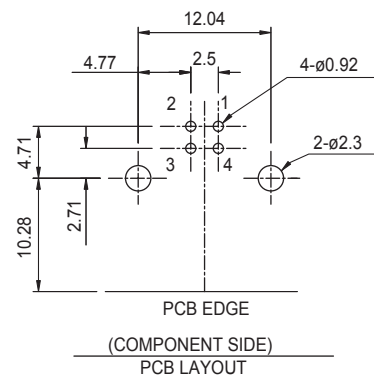

HOW TO ORDER

SERIES NO.	ROW OPTION	CONTACT TYPE	PLATING	SHELL	HOUSING COLOR
2002	S	R	S	1	B
	S: SINGLE	R: R/A DIP M: R/A SMT S: STRAIGHT DIP	S: SELECTIVE GOLD PLATED	1: W/O REAR SHELL 2: W/REAR SHELL	B: BLACK W: WHITE