

C-TEK MINI USB P.C.B TYPE 4P / 5P / 8P




MATERIAL:

SHELL : BRASS, TIN PLATED.
HOUSING : THERMOPLASTIC.
CONTACT : PHOSPHOR BRONZE, SELECTIVE GOLD OVER NICKEL.

ELECTRICAL CHARACTERISTICS:

CURRENT RATING : 5 AMPS.
VOLTAGE : 30V AC. (R.M.S.)
CONTACT RESISTANCE : 30 MILLIOHMS MAXIMUM INITIAL.
INSULATION RESISTANCE : 1000 MEGOHMS MINIMUM.
OPERATING TEMPERATURE : -55°C ~ +85°C

DIMENSIONS

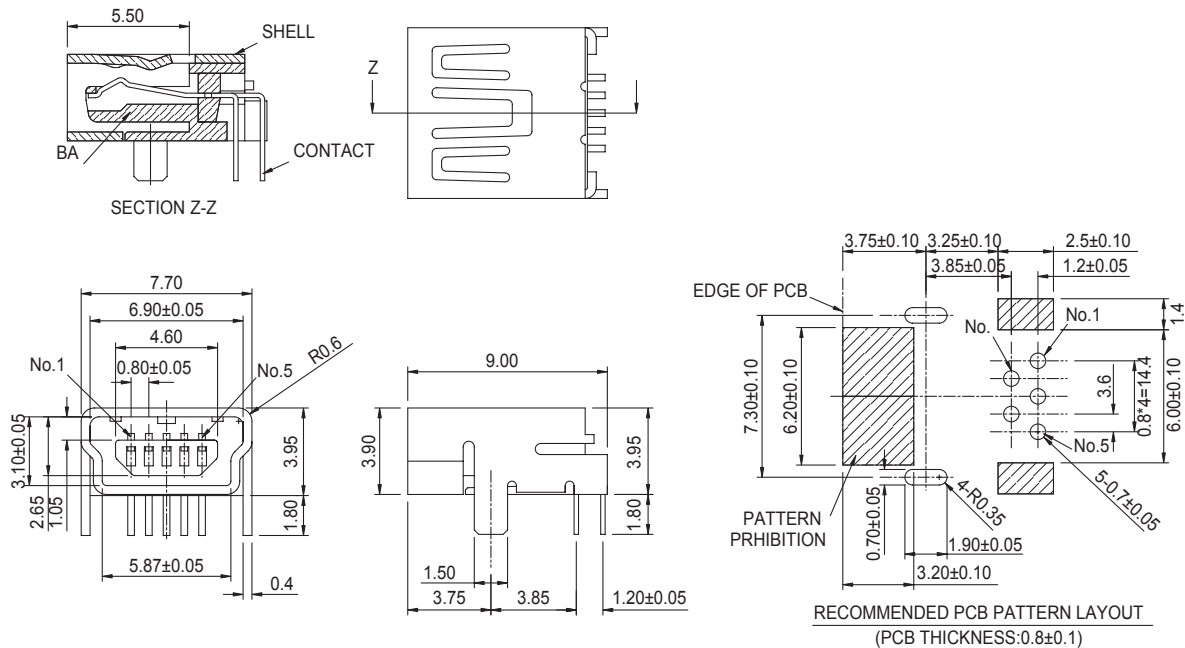

HOW TO ORDER

SERIES NO.	TYPE	CONTACT TYPE	PLATING	PACKAGE
2004	4	R	S	T
	4 5 8	R: R/A DIP M: R/A SMT	S: SELECTIVE GOLD PLATED	T: TUBE R: T&R TA: TRAY