


C-TEK 3.0MM MINI FIT POWER CONNECTOR

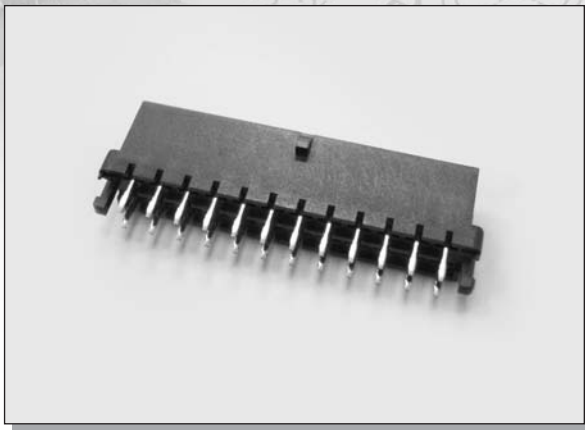

MATERIALS :

HOUSING : PBT30 % GF (UL 94V-0), BLACK.

TERMINAL : BRASS.

SPECIFICATION

CURRENT RATING : 5 AMP. MAX.


WITHSTAND VOLTAGE : 1500V AC R.M.S. FOR 1 MINTUE.

INSULATION RESISTANCE : 1000M OHMS MIN.

WITHSTANDING VOLTAGE : 1500V AC / MINTUE.

OPERATING TEMPERATURE : -25°C TO +85°C.

DIMENSIONS

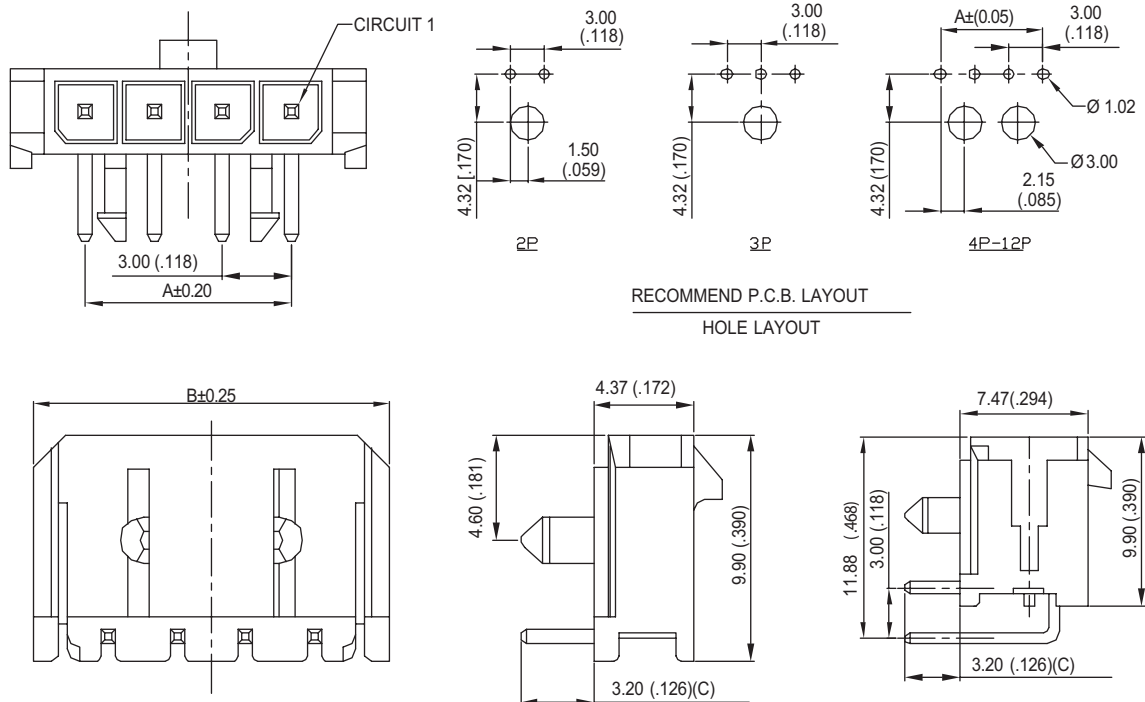

HOW TO ORDER

SERIES NO.	CONTACT NO.	MOUNTING TYPE	PLATING	POST	COLOR	
3005	1 x 3	R	T	1	B	
	SINGLE ROW: 1x2 - 1x12 DUAL ROW: 2x1 - 2x12	R: R/A S: STRAIGHT	T: TIN PLATED	1: W/O POST 2: W/POST	B: BLACK	