


C-TEK 1.25MM PITCH WIRE TO BOARD



MATERIAL:
 INSULATOR : NYLON 66 UL94-V0.
 CONTACT : PHOSPHOR BRONZE OR BRASS.
 (STANDARD IS BRASS)

ELECTRICAL CHARACTERISTICS:
 CURRENT RATING : 1 AMP.
 WITHSTANDING VOLTAGE : 800V AC MIN.
 CONTACT RESISTANCE : 130 MILLIOHMS MAX.
 INSULATOR RESISTANCE : 1000 MEGOHMS MIN.
 OPERATING TEMPERATURE : -25°C ~ +85°C

DIMENSIONS

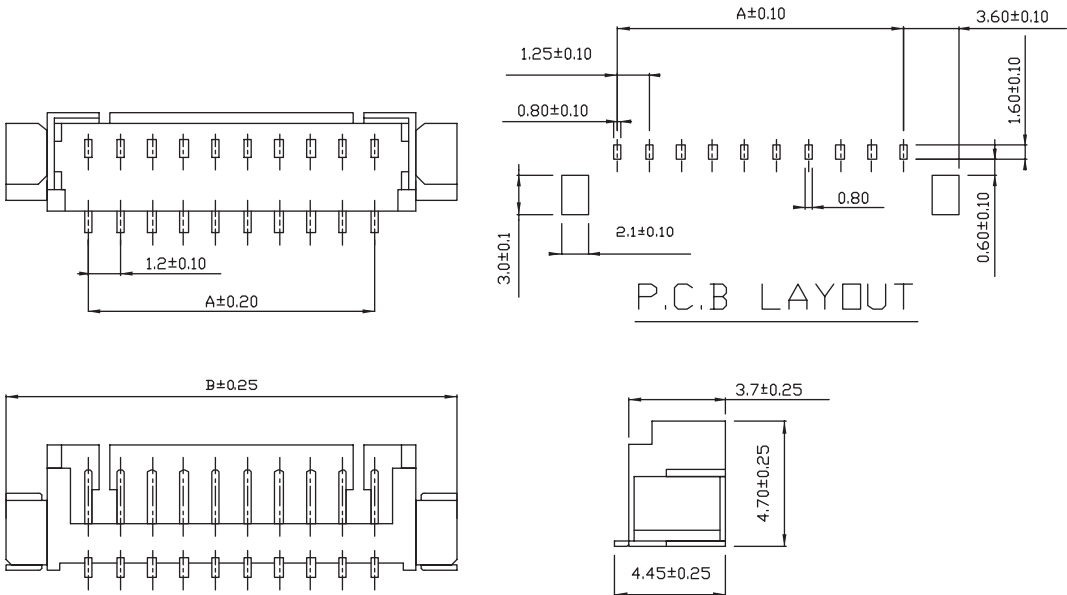

HOW TO ORDER

				HOUSING		TERMINAL	
SERIES NO.	CONTACT NO.	CONTACT TYPE	PLATING	SERIES NO.	CONTACT NO.	SERIES NO.	PLATING
3016	10	R	T	3016A	12	3016A	T
	2 - 15	R: R/A S: STRAIGHT M1: R/A SMT M2: STRAIGHT SMT	T: TIN PLATED		2 - 15		T: TIN PLATED