

C-TEK SMART CARD 8P PROFILE 6.8MM SLIDING DIP HOUSING OPEN





MATERIAL:

BASIC : PBT. UL94V-0.
COVER : PBT. UL94V-0.
CLUTCH : PBT. UL94V-0.



SPECIFICATION:

VOLTAGE RATING : 50V DC MAX.
CURRENT RATING : 0.5A MAX.
OPERATING TEMPERATURE : -20°C ~ +80°C
INSULATION RESISTANCE : 1000 MΩ MIN.
CONTACT RESISTANCE : 100 MΩ MAX.

DIMENSIONS

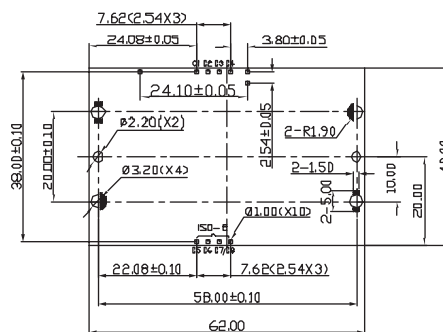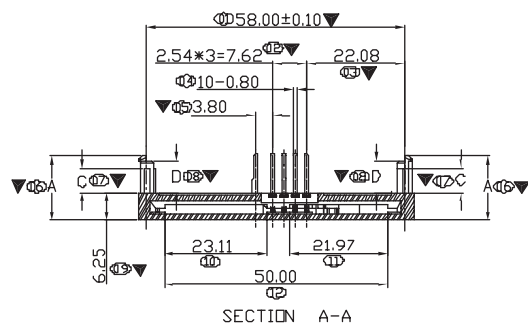

Unit:mm; Tolerances:±0.10mm
Reference dimension for PCB layout

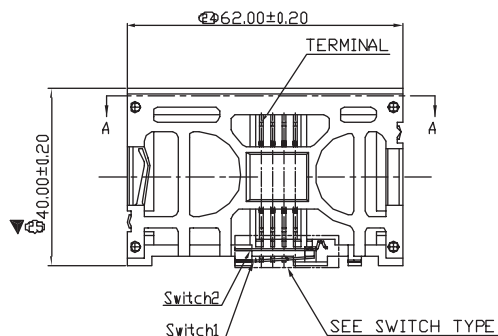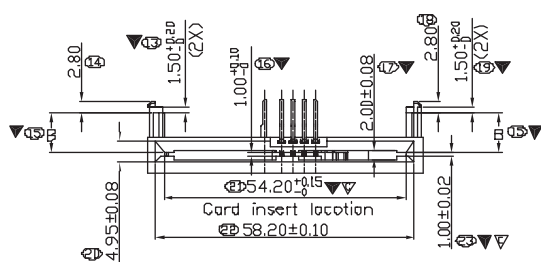

HOW TO ORDER

SERIES NO.	CONTACT NO.	CONTACT TYPE	PLATING	SWITCH	STAND OFF
9003	8	S	S	O	1
	8P	S: SLIDING DIP	S: SELECTIVE GOLD PLATED S1: SELECTIVE GOLD 15u" S2: SELECTIVE GOLD 30u"	O: OPEN C: CLOSE	1: 0MM 2: 3.15MM 3: 3.5MM 4: 5.5MM